









3M™ Sound Detector SD-200






Measuring Sound Pressure Level (SPL)

1. Place windscreen over microphone (if not attached)
2. Power on  the SD-200 and check that the battery indicator  is not present.
 - If present, charge the instrument prior to measuring.
3. Select desired weighting and/or response time. (See diagram #5 and #9.)
4. Position the SD-200 microphone so it is angled about 70 degrees from the noise source.
5. Measures: when first powered on, the current SPL will be displayed or the last viewed parameter.
 - For integrated measurements, press the Run/Stop  key. (Unlike SPL, the L_{EQ}/L_{AVG} values will provide steadier values over a period of time until values become more stable.)
 - To view measurements, repeatedly press the Mode  key. (This cycles through the measurements.)
 - Press Run/Stop  key to Stop measuring.
6. Power off by pressing and holding the  key until it turns off (while not in run mode).

QUICK START




Display and Keys

1. LEDs: Used in the LED Alert  measurement screen
2. Screen indicators: Slow time response & A frequency weighting (S, A is a common setting)
3. Measurement type (SPL, L_{EQ}/L_{AVG} , LED Alert , MAX, MIN, Run-Time )
 - Note: No indicator signifies SPL
4. Measurement value
5. F/S (Fast/Slow time response) key
6. Mode key (cycles through measurement screens)
7. Run/Stop key for averaging values (L_{EQ}/L_{AVG} , MAX, MIN, LED Alert , Run-Time )
8. Power On/Off key
9. A/C frequency weighting key



Viewing Measurements

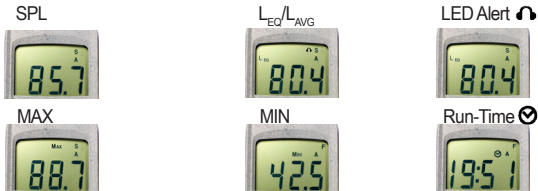


Pressing the mode key will cycle you through the measurement screens (as displayed below):



LED Alert Measurement Screen

This screen displays L_{EQ}/L_{AVG} data and activates the LEDs at specific dB levels.

LED Alert levels

-  Green LED: flashes when noise measurements are 80 - 85 dB
-  Yellow LED: flashes when noise measurements are 85- 105 dB
-  Red LED: flashes when noise measurements are above 105 dB

IMPORTANT: For appropriate use of hearing protection devices, consult your company's safety professional, applicable local standards, or call 3M at 1-800-243-4630. (Note: Hearing protection sold separately.)

For more information, in United States, contact:

Website: www.3M.com/OccSafety

Technical Assistance: 1-800-243-4630

For other 3M products: 1-800-3M HELPS

Or 1-651-737-6501

©2011 3M Company

3M Occupational Health and Environmental Safety Division
3M Center Building 0235-02-W-70
St. Paul, MN 55144-1000
Printed in U.S.A.

34-8706-1605-8