

# SST DOCK

Bump, Calibration and Configuration station compatible with full SST Range



The SST Dock is an automated test station that allows Bump and Calibration testing and is compatible with the full SST Range in one module. It has the capability to be connected via Wi-Fi, BLE or Cellular and allows for desk, wall and hard case mounted dependent on your application.

## FEATURES AND BENEFITS



### EASY SETUP

SST-Dock is designed with ease of use in mind. Easily assign gas cylinders with the NFC reader and this will input the Span Values, Lot Numbers and Expiry dates directly into the SST-Dock. Also with the touch screen display it allows you to configure the SST-Dock to tailor it to your needs. The SST-Dock provides easy unit set up features so no PC needed for product changes.



### RAPID BUMP

SST-Dock enables three levels of bump testing. These levels are 50, 70 and 90% of gas and gives you the option to test units in seconds, saving you in test gas costs. These results are all saved in the SST-Dock and if connected can be shared via mail or seen in the WatchGas Software.



### CONNECTIVITY

SST-Dock offers a wide range of connectivity. The docking station can be a standalone system and information can be sent via email to a printer or laptop or phone. If you want the system to be connected, then you can connect directly to a Wi-Fi network, or the device can be fitted with a Sim card allowing for connectivity to a cellular network. This makes sending reports and data super easy.



### PLATFORM DESIGN

It was important for us and our customers to have a system that was designed to take all SST units. We have achieved this and with one module you can bump, calibrate, and configure the SST1, SST4 (Micro and Mini), SST-PUMP and SST-5. This reduces the size of the docking system and reduces costs of having individual modules.



### LOW GAS NOTIFICATION

Docking Stations are a critical part of a site's operation and can't afford to be down due to gas running out. The SST-Dock comes with a pressure regulator that will indicate when gas is running low or coming to its expiry date. This means you can take a proactive approach and always ensure your systems have gas to allow for daily testing.



### MOUNTING OPTIONS

We understand that different application requires docking stations to be located in a era of environments. The SST-Dock comes with brackets that allow for wall mounting and will hold one cylinder in a tidy fashion. It can also be tailored for desktop use or as a mobile device in a hard case and up to 100 calibrations can be done of one battery charge.

# SST DOCK

Bump, Calibration and Configuration station compatible with full SST Range



## SOFTWARE

SST-Dock is Bump, Calibration and configuration station that is designed to carry out daily compliance checks of your gas detection fleet or for use as a service provider that have a large customer fleet to maintain. The SST Dock is compatible with SST1, SST4 (all models), SST4 Pump and SST5 meaning one docking solution for your entire fleet and reducing infrastructure costs.

SST-Dock also offers full flexibility, allowing for a stand-alone solution where the data can be captured and interrogated, either at a dock level or can be connected to the WatchGas cloud-based software. This software allows you to have a full overview of your fleet and be notified of non-compliances, from bump and calibration expiries, gas alarms or even showing when test gas is running low. With options for the system to be used on a desk, wall mounted or portably in a hard case giving you up to 100 calibrations from one charge it has never been easier to ensure the up time of your gas detection fleet.

This compact yet rugged solution can be tailored from a simple bump test station through to a sophisticated connected test station giving you constant updates of your fleet health and compliance status.


## SST DOCK SPECIFICATIONS

<b>Dimensions (LxWxH)</b>	28 x 21 x 10 cm (11 x 8.2 x 4 in.)
<b>Weight</b>	1.8 kg (63.5 oz.)
<b>Temperature</b>	+5-40 °C
<b>Humidity</b>	10% to 90% RH
<b>Storage Temperature</b>	0-50 °C
<b>Power Supply</b>	12 V 1,5 A
<b>Real Time Clock</b>	Yes, updateable
<b>Data Storage</b>	More than 1 year of operation
<b>Connection capability</b>	Wi-Fi, Cellular, BLE – Connected into the Cloud and WatchGas App
<b>Gas inlets</b>	Fresh air inlet, 2 Gas inlets and one purge
<b>Testing Function</b>	Bump Test, Calibration (optional), Device Configuration and Data Download. Also tests device Alarms, Visual LED's
<b>Device Compatibility</b>	One module compatible with SST Range
<b>Certifications &amp; Approvals</b>	EMC Directive 2014/30/EU Low Voltage Directive 2014/35/EU FCC Part 15 RoHS Directive 2011/65/EU RED 2014/53/EU
<b>Warranty</b>	2 years


## FOR MORE INFORMATION

[www.watchgas.com](http://www.watchgas.com)  
[info@watchgas.com](mailto:info@watchgas.com)

WatchGas SST Dock DS EN 19-04-23 V1.0 © 2023 WatchGas B.V.  
WatchGas is dedicated to continuously improving its products. Therefore, the specifications and features mentioned in this datasheet are subject to change without prior notice.

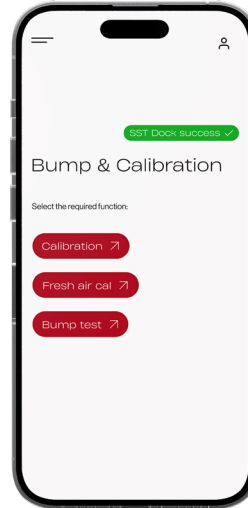

Home screen

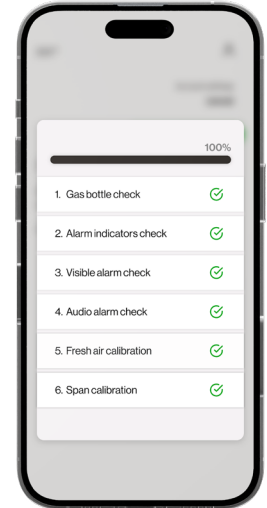

Calibration

## ACCESSORIES



Gas cylinder



Pressure sensor



Last-o-More



Hard case

**ProCare | SAFETY**  
*We take intensive Care*

**ProCare Safety** 0031 (0) 50 207 21 72  
Zernikepark 16A info@procaresafety.nl  
9747 AN Groningen www.procaresafety.nl